

25004 25mm高脚两段阀芯

25mm high base two phased cartridge

阀芯技术参数

Technical Characteristics of The Cartridge

开启角度：12° / 23° 旋转角度：100° 最高使用温度：90°C
Max On/Off angel : 12° / 23° Max Cold/Hot turning angel : 100° Max temperature : 90°C

建议锁紧力矩：6~8Nm 冷热操作力矩：0.15~0.3Nm
Tightness of hex nut torque : 6~8Nm Cold / Hot operation torque : 0.15~0.3Nm

开关操作力矩：0.2~0.4Nm
On/Off operation torque : 0.2~0.4Nm

阀芯破坏强度：≥8Nm
Broken torque : ≥8Nm

爆破压：≥35bar
Burst pressure : ≥35bar

3bar水压下流量值：12°≥6L/min 23°≥12.5L/min
Flow rate at 3bar : 12°≥6L/min 23°≥12.5L/min

寿命测试：EN817:2008 140,000cycles
ASME A 112.18.1-2008 1,000,000cycles

Life cycle test : EN817:2008 140,000cycles
ASME A 112.18.1-2008 1,000,000cycles



认证

Certification




Certified to NSF/ANSI 61-G

DVGW/KTW



ACS

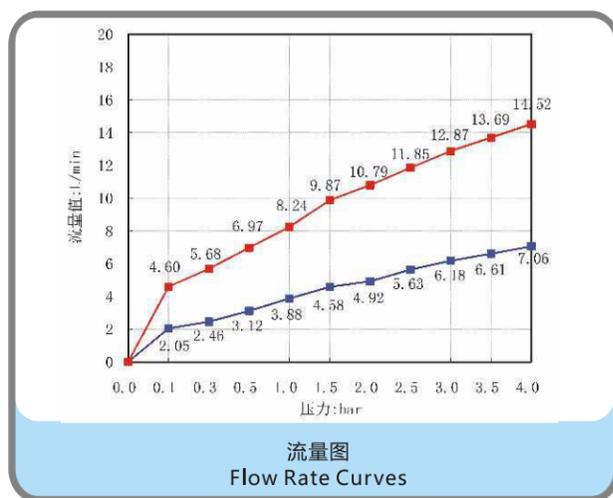

安装尺寸图

Drawings of Mounting Dimensions

