

35001 35mm平脚阀芯

35mm flat base cartridge

阀芯技术参数

Technical Characteristics of The Cartridge

开启角度：23° 旋转角度：90° 最高使用温度：90°C
Max On/Off angel : 23° Max Cold/Hot turning angel : 100° Max temperature : 90°C

建议锁紧力矩：10~15Nm 冷热操作力矩：0.2~0.4Nm (任何水温)
Tightness of hex nut torque : 10~15Nm Cold / Hot operation torque : 0.2~0.4Nm (Under any water temp)


开关操作力矩：0.15~0.35Nm (任何水温)
On/Off operation torque : 0.15~0.35Nm (Under any water temp)

阀芯破坏强度：≥12Nm
Broken torque : ≥12Nm

爆破压：≥35bar
Burst pressure : ≥35bar





3bar水压下流量值：≥24L/min
Flow rate at 3bar : ≥24L/min

寿命测试：EN817:2008 280,000cycles
ASME A 112.18.1-2008 2,000,000cycles
Life cycle test : EN817:2008 280,000cycles
ASME A 112.18.1-2008 2,000,000cycles

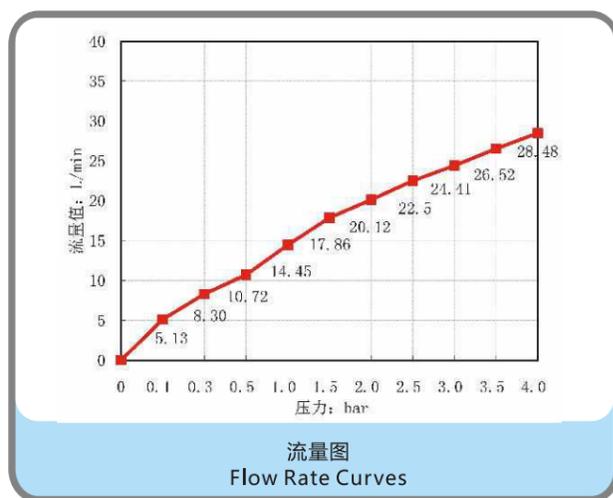

安装尺寸图

Drawings of Mounting Dimensions

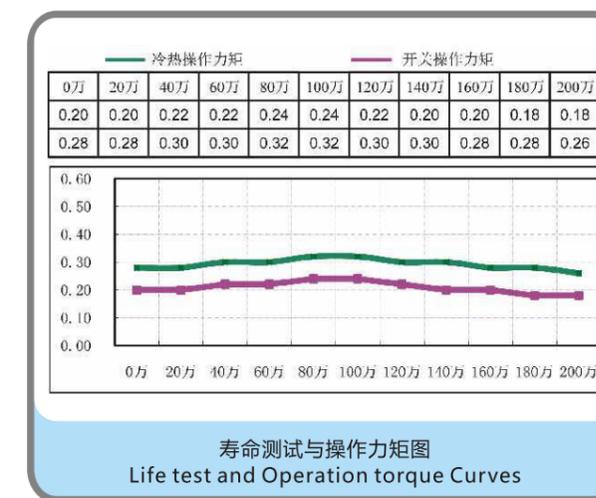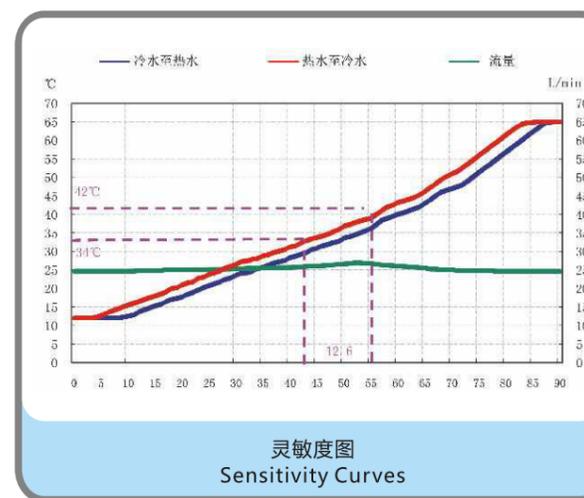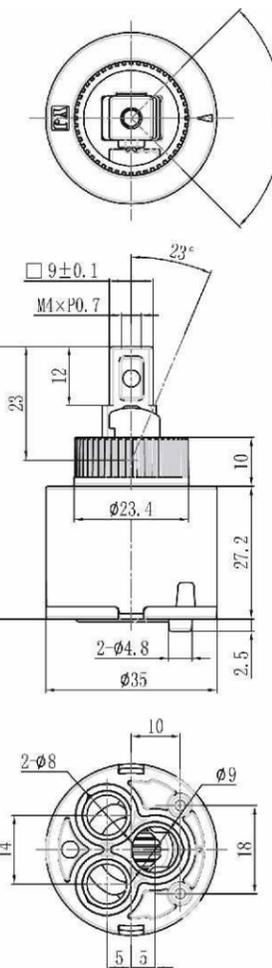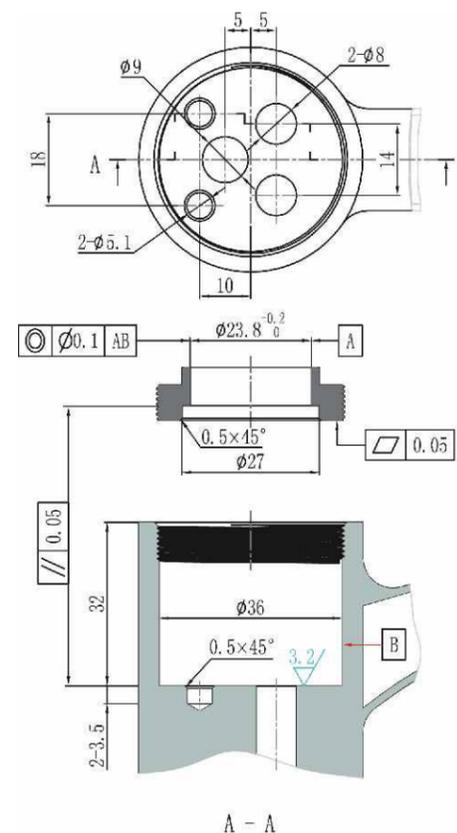

认证

Certification



DVGW/KTW



ACS

