

40005 40mm平脚无声两段阀芯

40mm flat base two phased without click sound cartridge

阀芯技术参数

Technical Characteristics of The Cartridge

开启角度：12° / 23° 旋转角度：110° 最高使用温度：90℃
Max On/Off angel：12° / 23° Max Cold/Hot turning angel：110° Max temperature：90℃

建议锁紧力矩：10~15Nm

Tightness of hex nut torque：10~15Nm

冷热操作力矩：0.2~0.4Nm (任何水温)

Cold / Hot operation torque：0.2~0.4Nm
(Under any water temp)

开关操作力矩：0.5~0.7Nm (任何水温)

On/Off operation torque：0.5~0.7Nm
(Under any water temp)

阀芯破坏强度：≥15Nm

Broken torque：≥15Nm

爆破压：≥35bar


Burst pressure：≥35bar

3bar水压下流量值：12°≥15L/min 23°≥29L/min

Flow rate at 3bar：12°≥15L/min 23°≥29L/min

寿命测试：EN817:2008 280,000cycles
ASME A 112.18.1-2008 2,000,000cycles

Life cycle test：EN817:2008 280,000cycles
ASME A 112.18.1-2008 2,000,000cycles

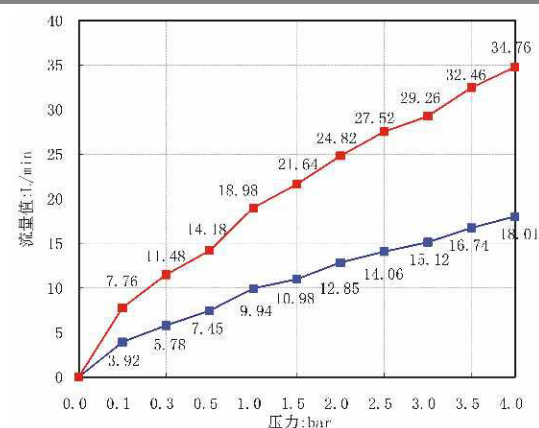

流量图
Flow Rate Curves

认证

Certification



DVGW/KTW



ACS




无声两段节水

Two phased without click sound


满足您对水龙头安全舒适的用水需求
In YJ Cartridge we make cartridges right

安装尺寸图

Drawings of Mounting Dimensions

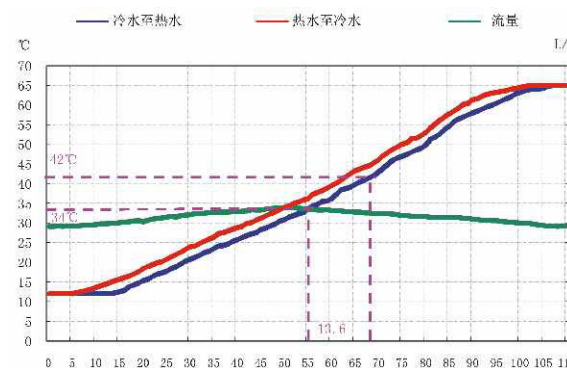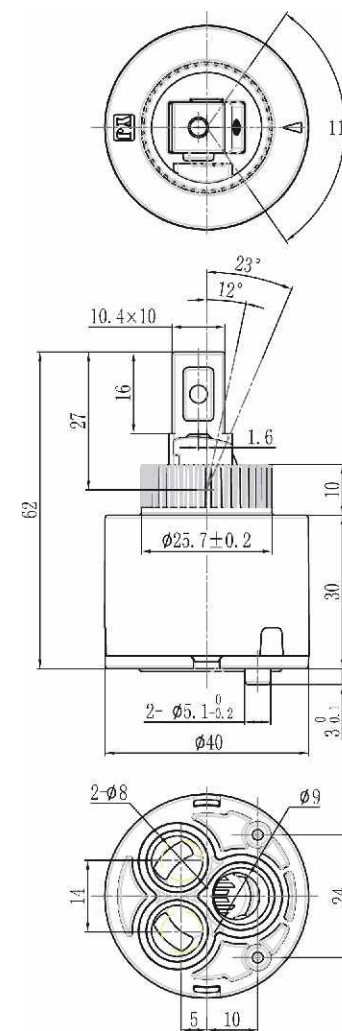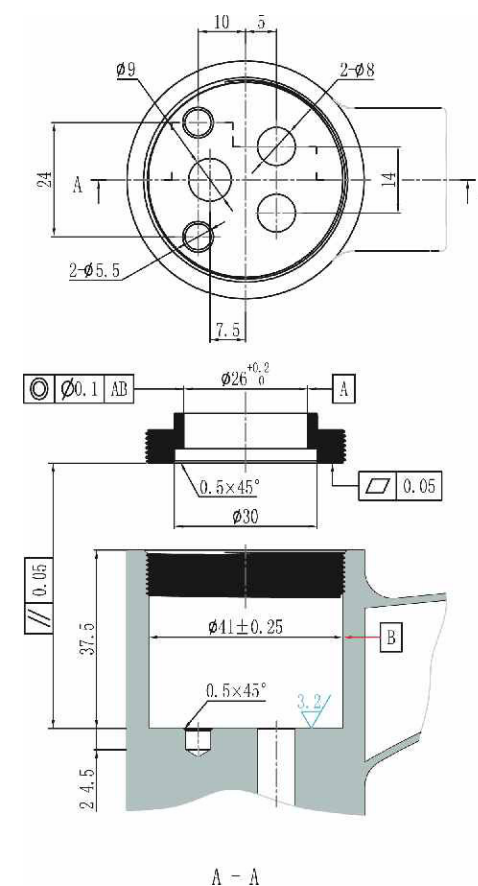

灵敏度图
Sensitivity Curves

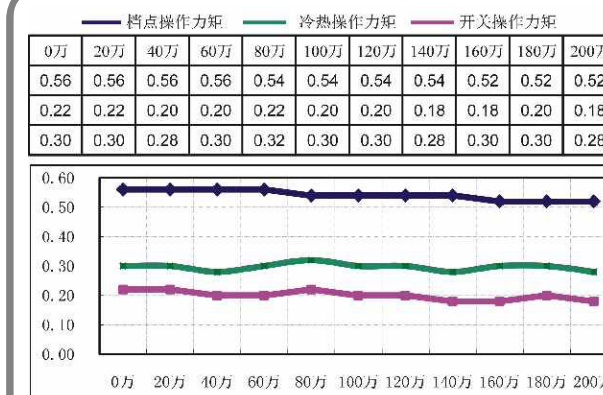

寿命测试与操作力矩图
Life test and Operation torque Curves